

Figure 100A


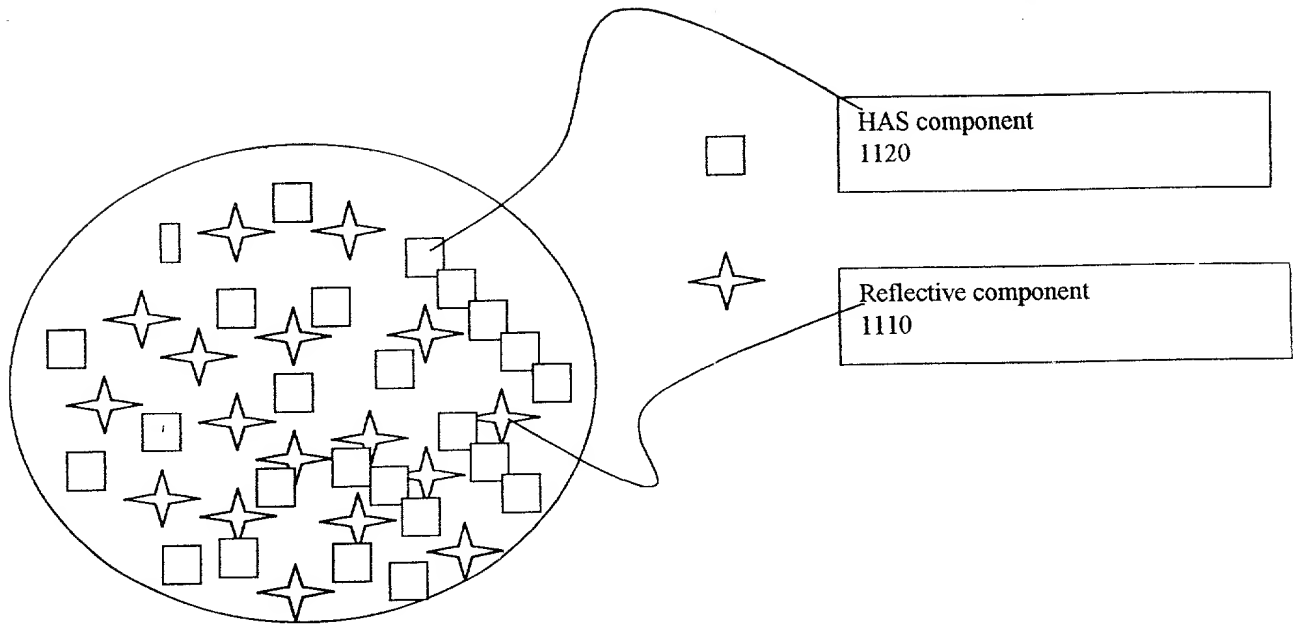


Figure 101A

Figure 103 A

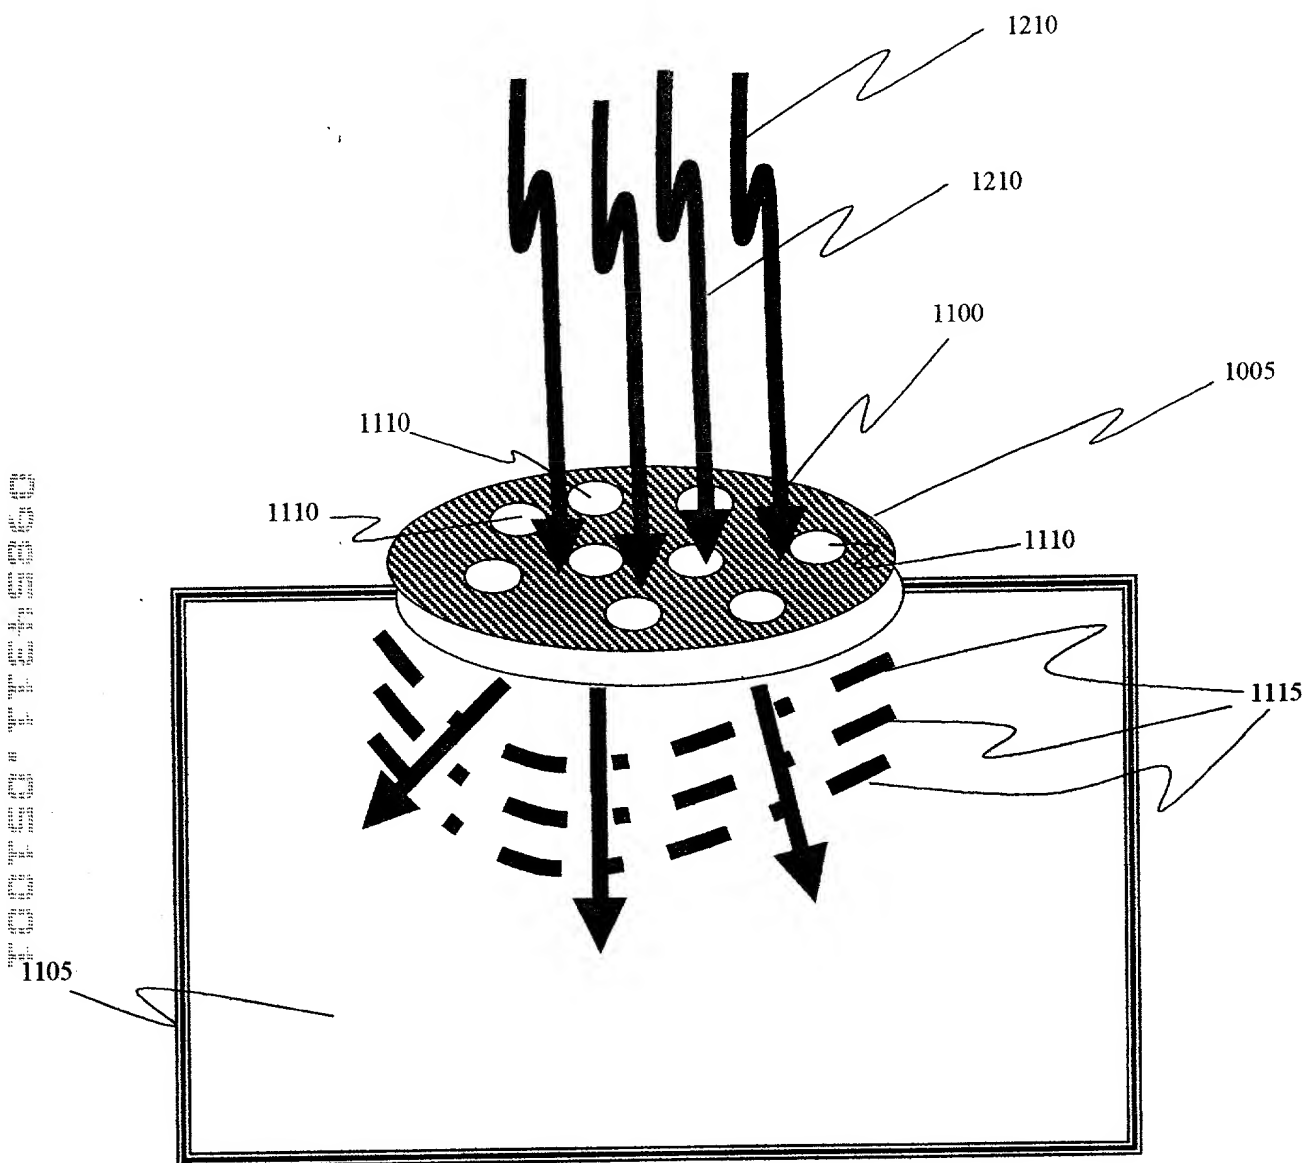


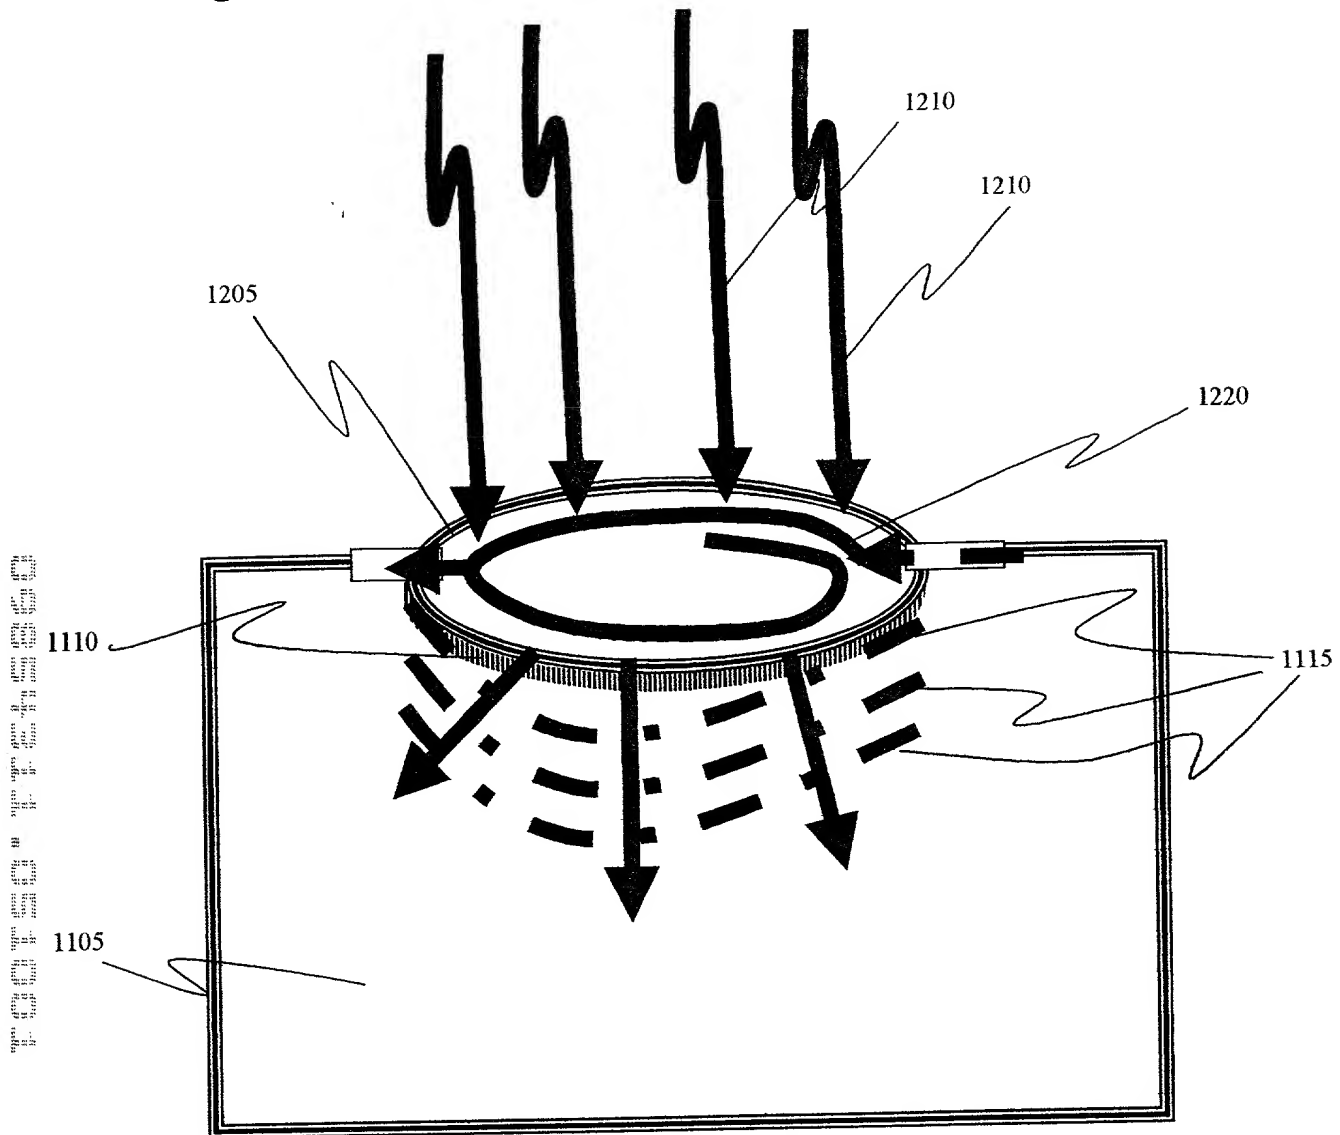
[illegible]

Figure 105A



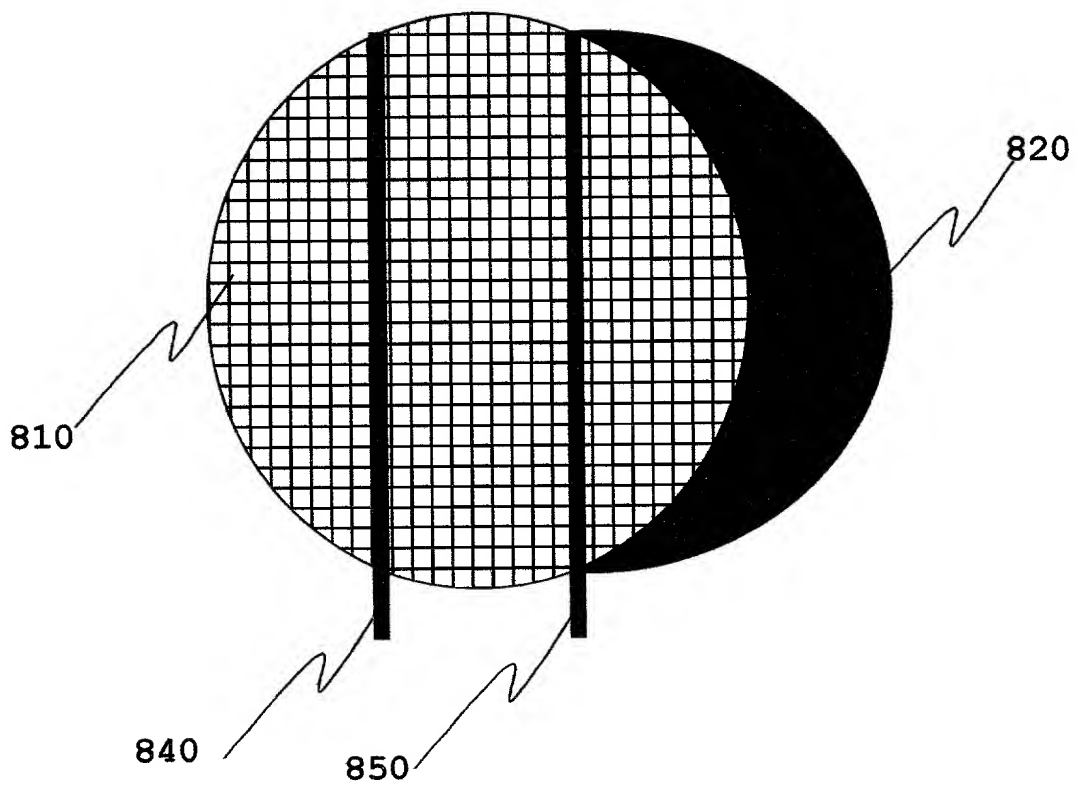


Figure 8

FIG. 9 is a schematic diagram of a system 900 for detecting a target 910. The system 900 includes a sensor 920, a processor 930, and a display 940. The sensor 920 is configured to detect the target 910 and generate a signal 950. The processor 930 is configured to process the signal 950 and generate a detection result 960. The display 940 is configured to display the detection result 960.

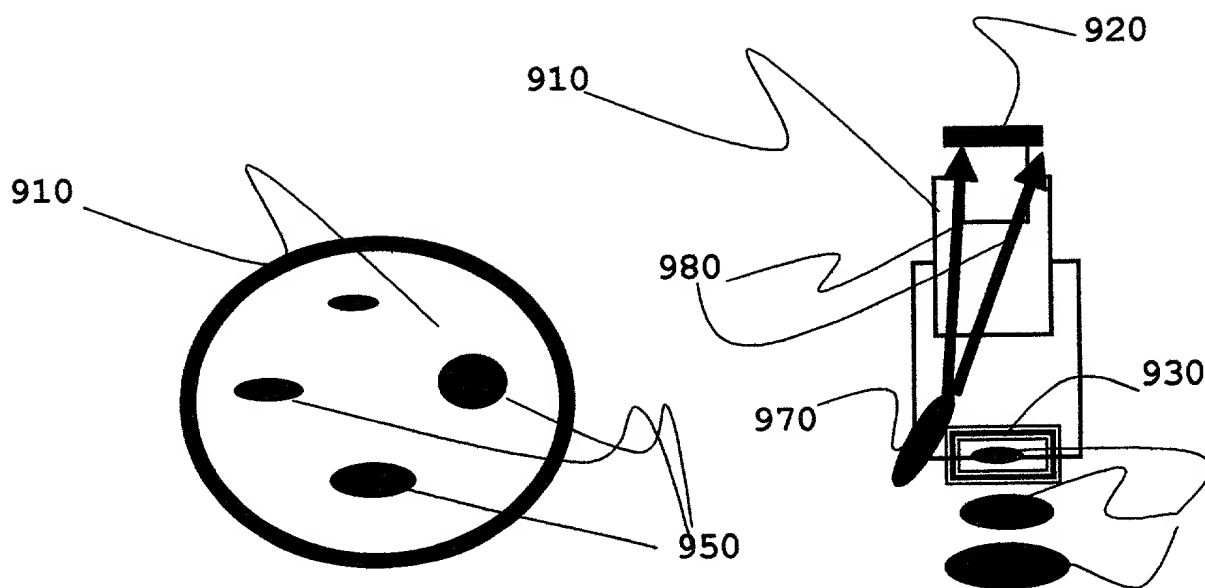


Figure 9

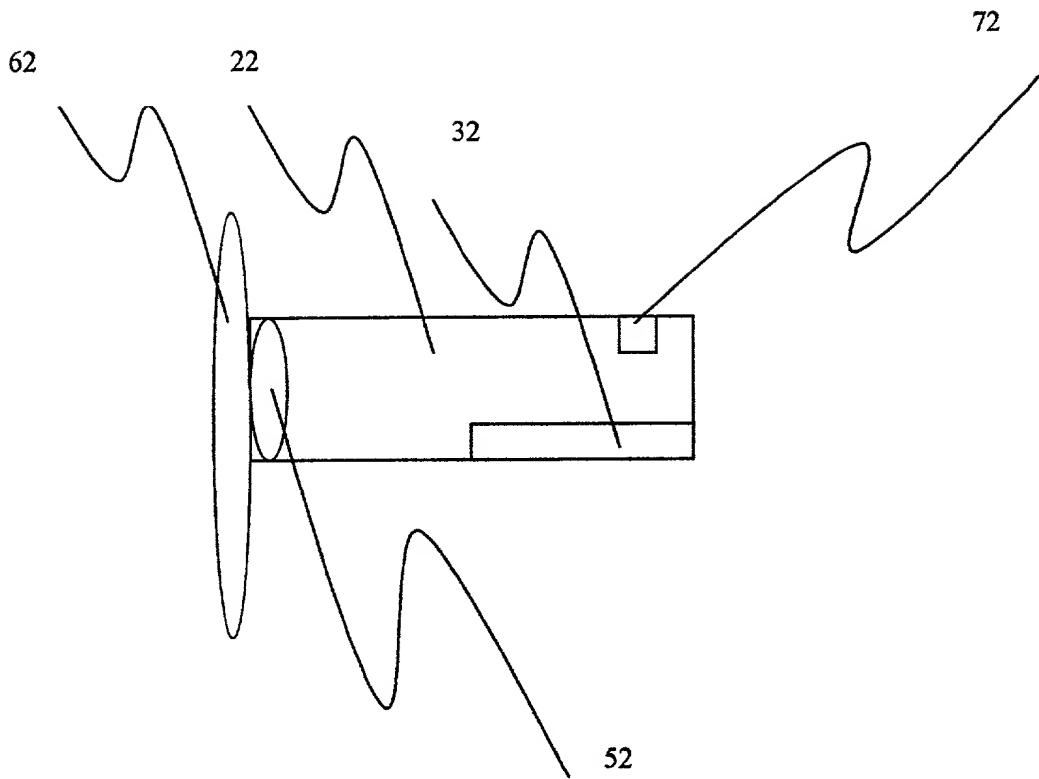


Figure 1.1

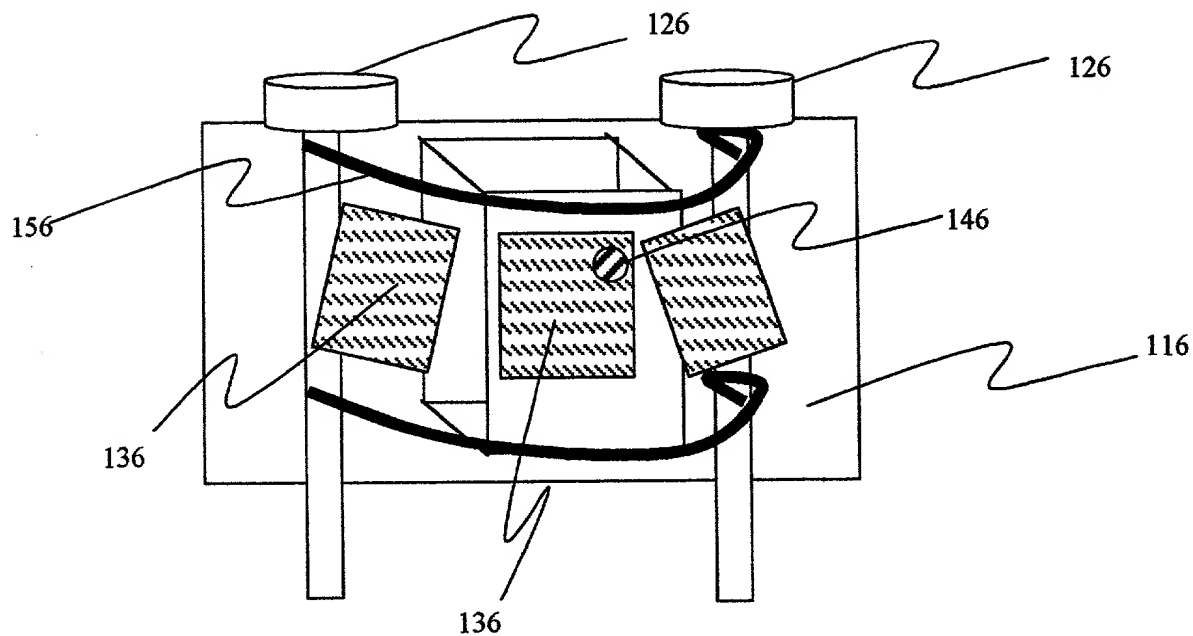


Figure 1.2

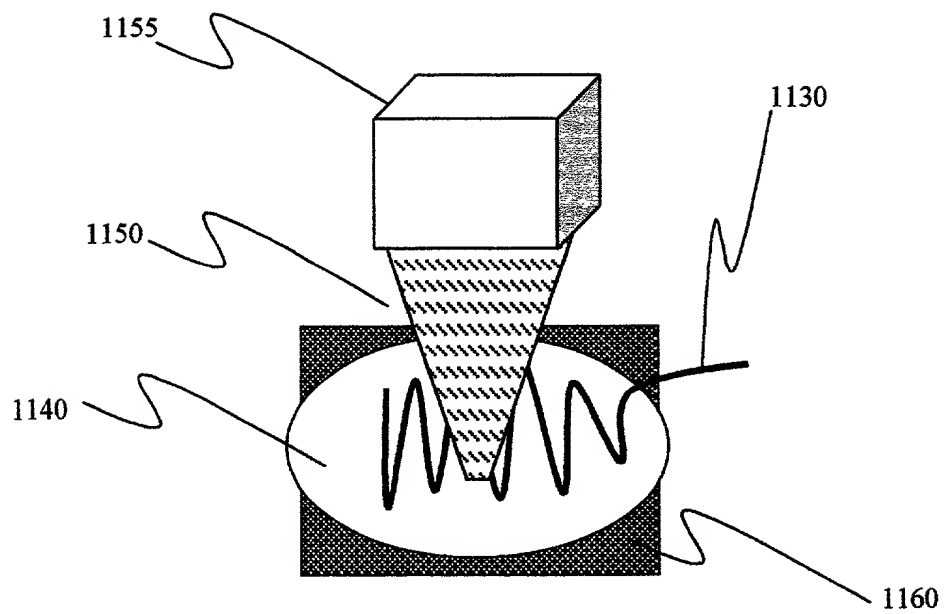


Figure 1.3

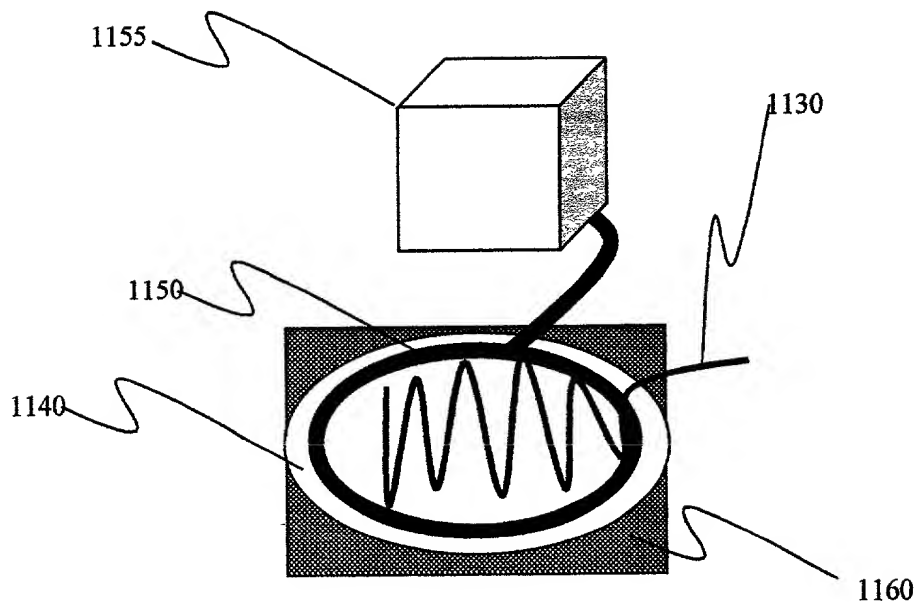


Figure 1.4

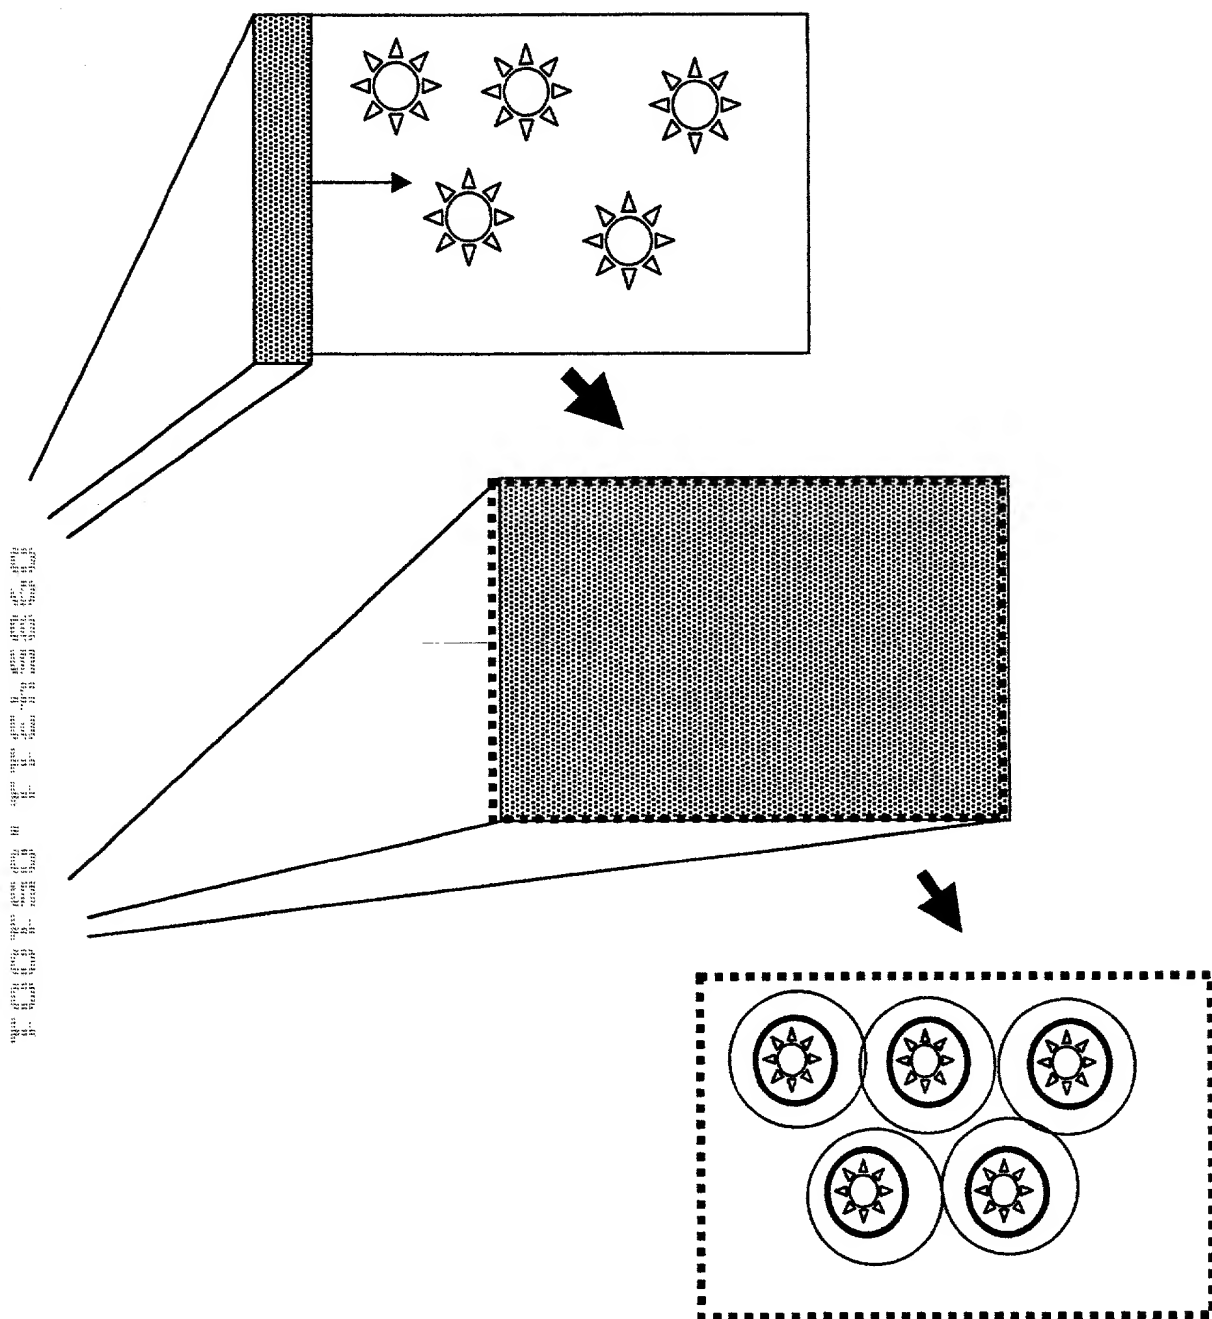


Figure 1.5

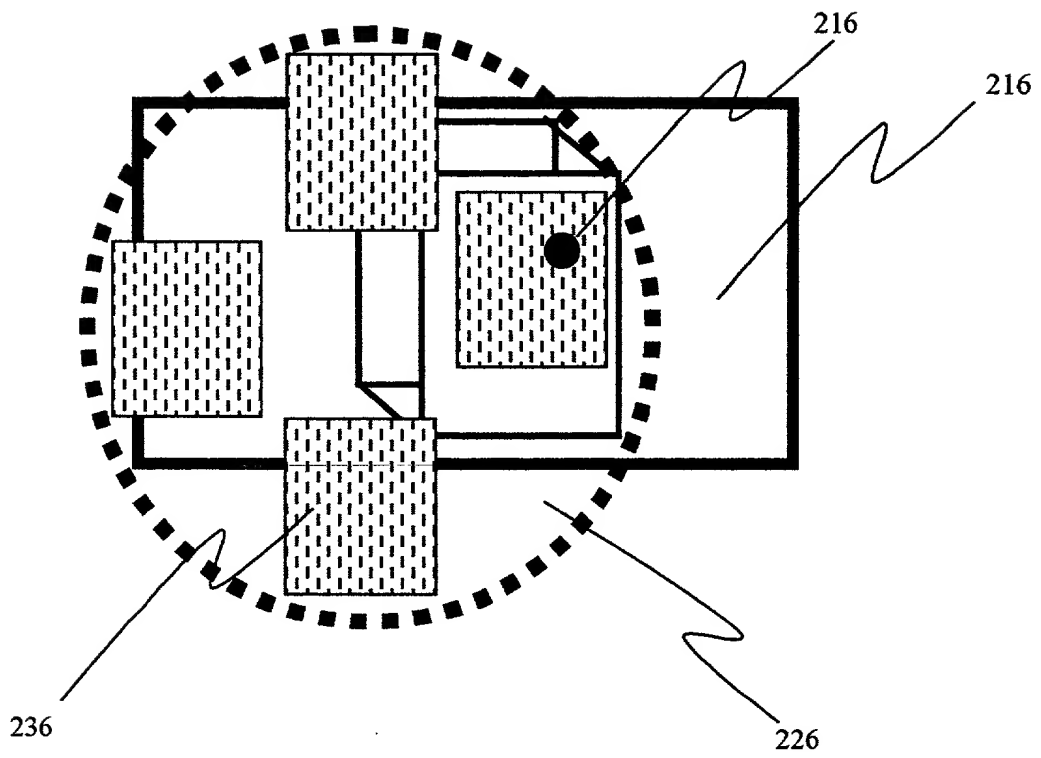


Figure 1.6

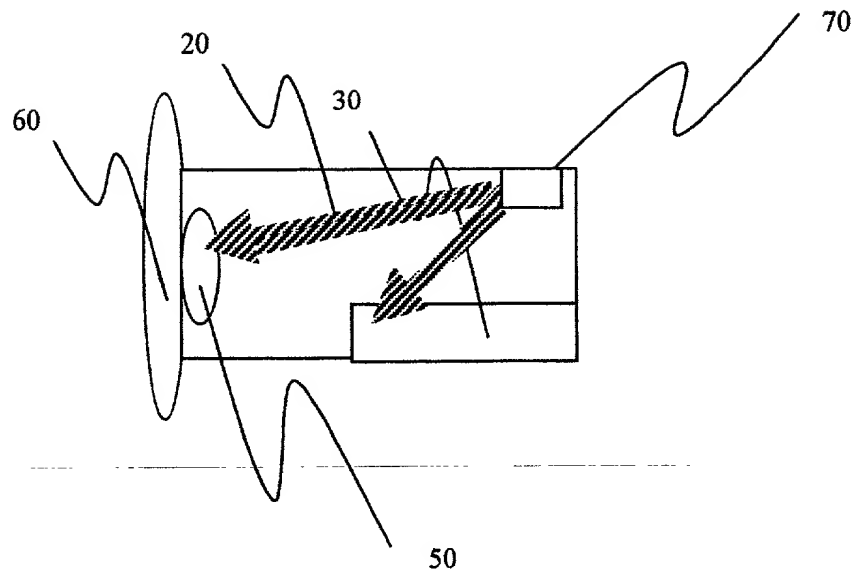


Figure 1.7

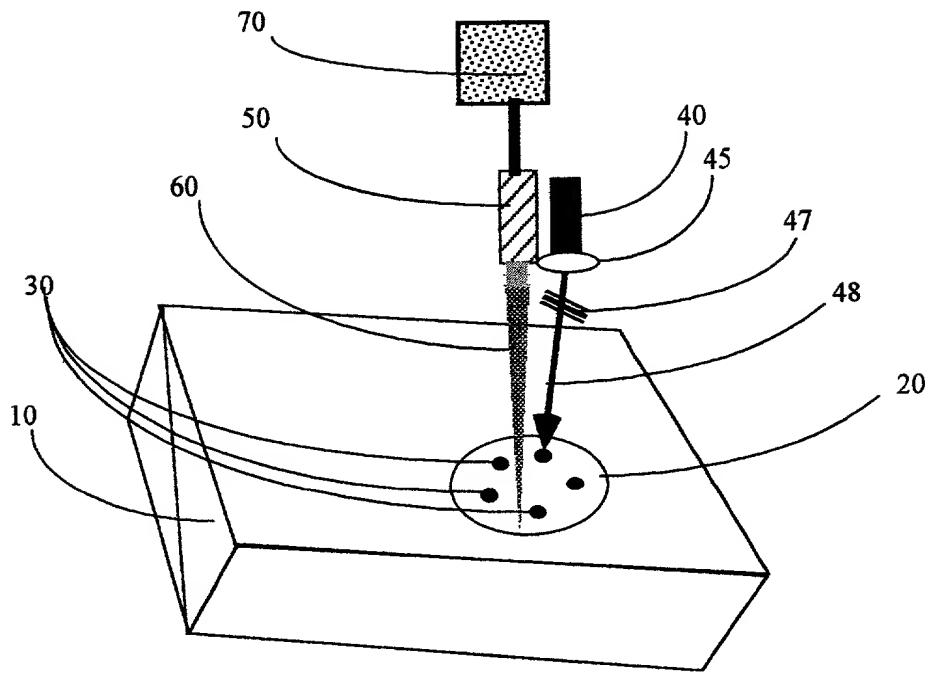


FIGURE 1A

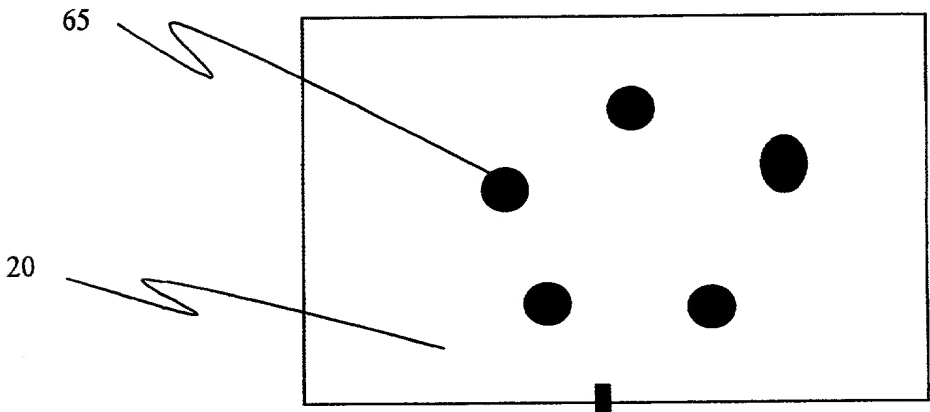


Figure 1B

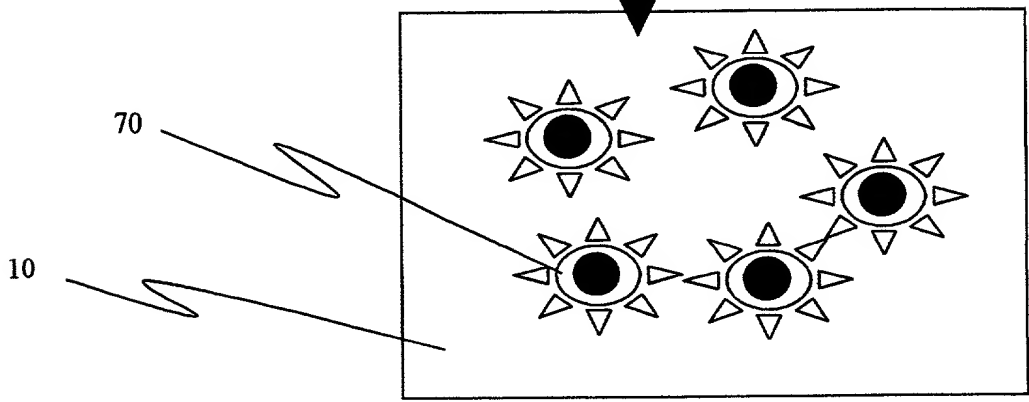


Figure 1C

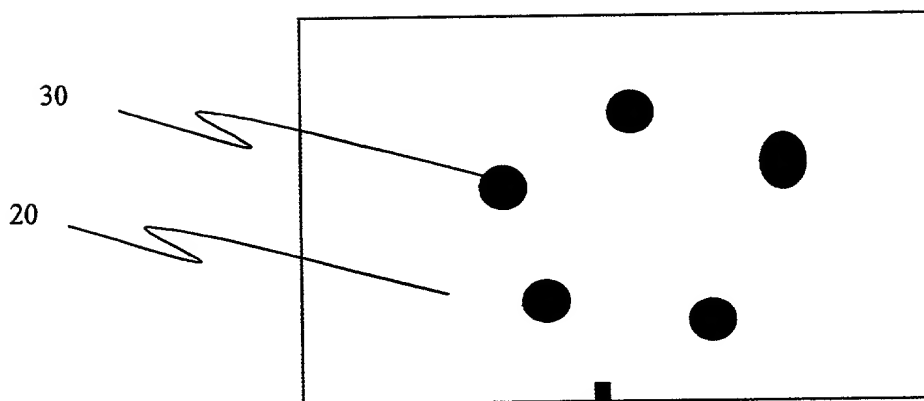


Figure 1D

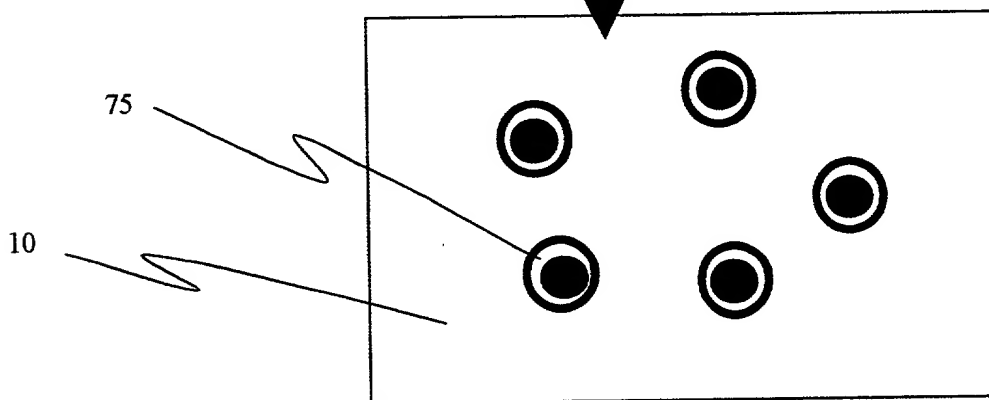


Figure 1E

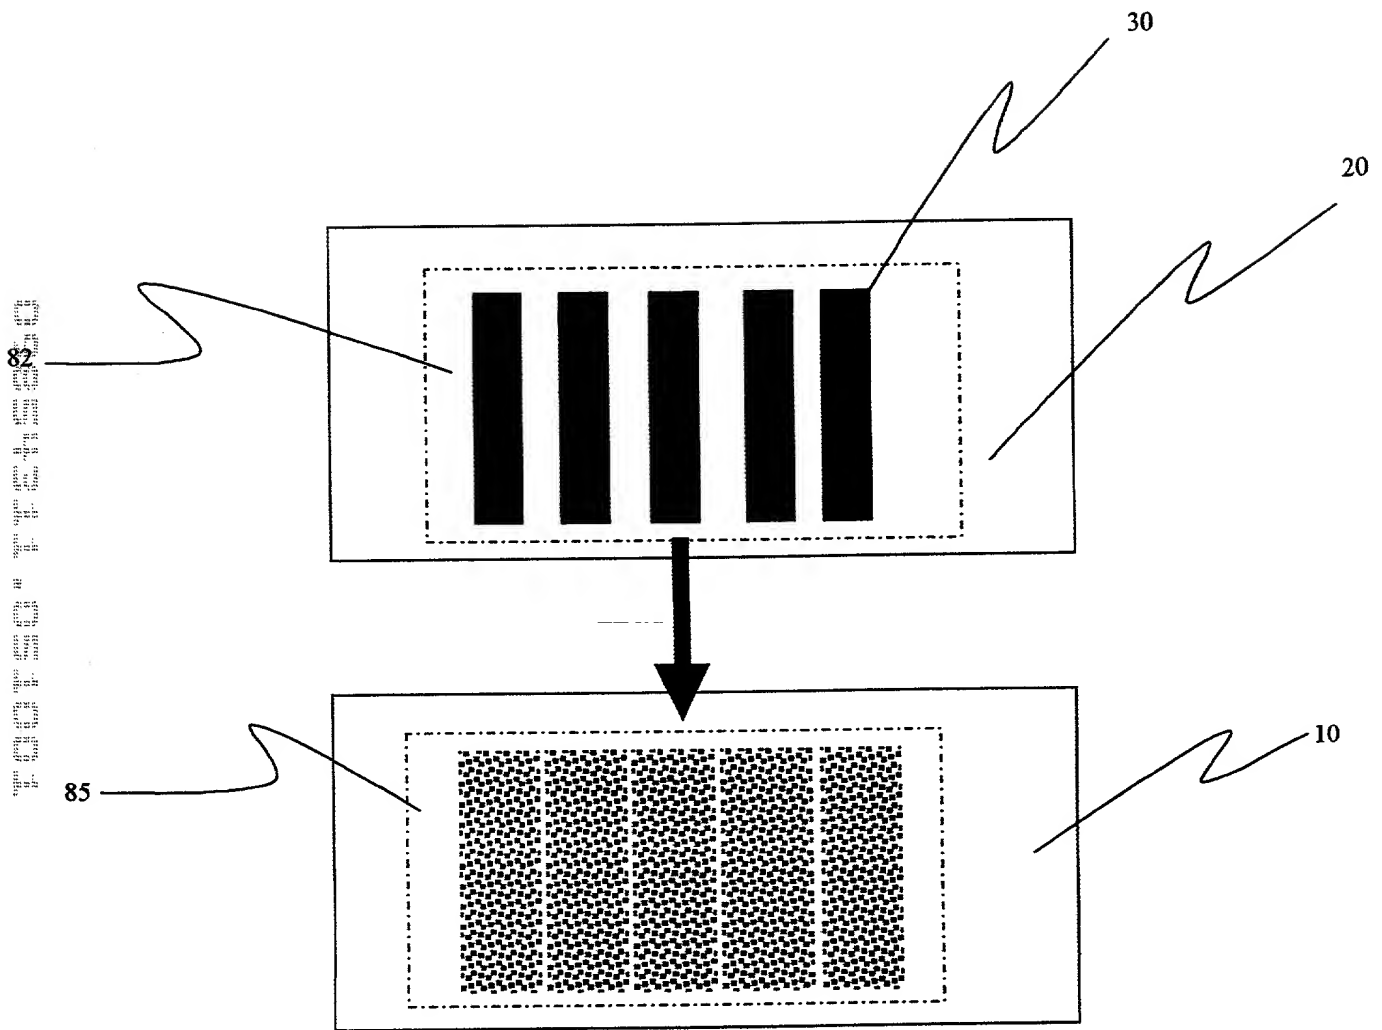


Figure 1F

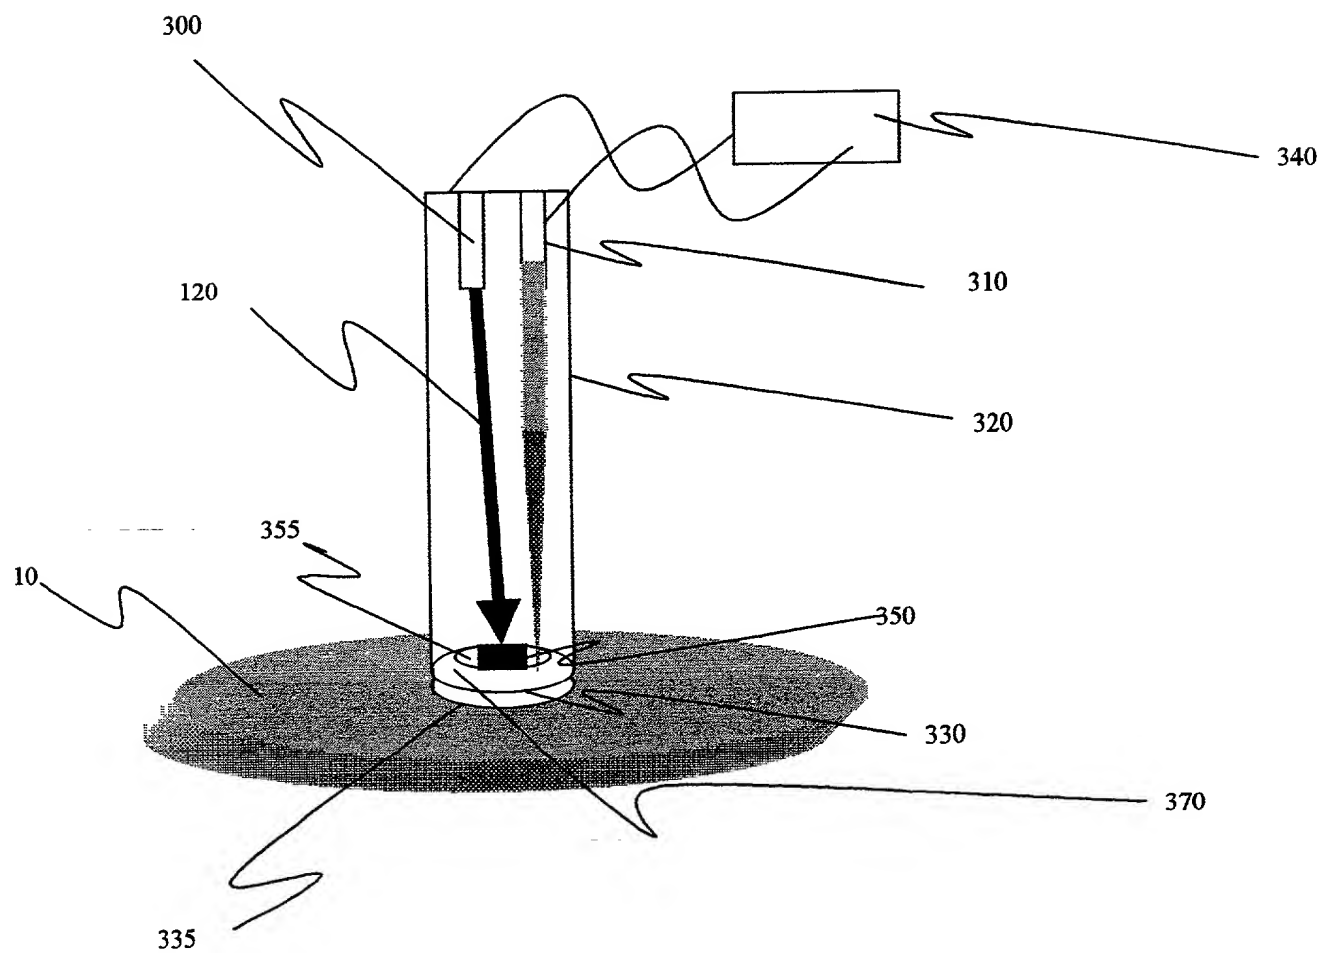


Figure 2A

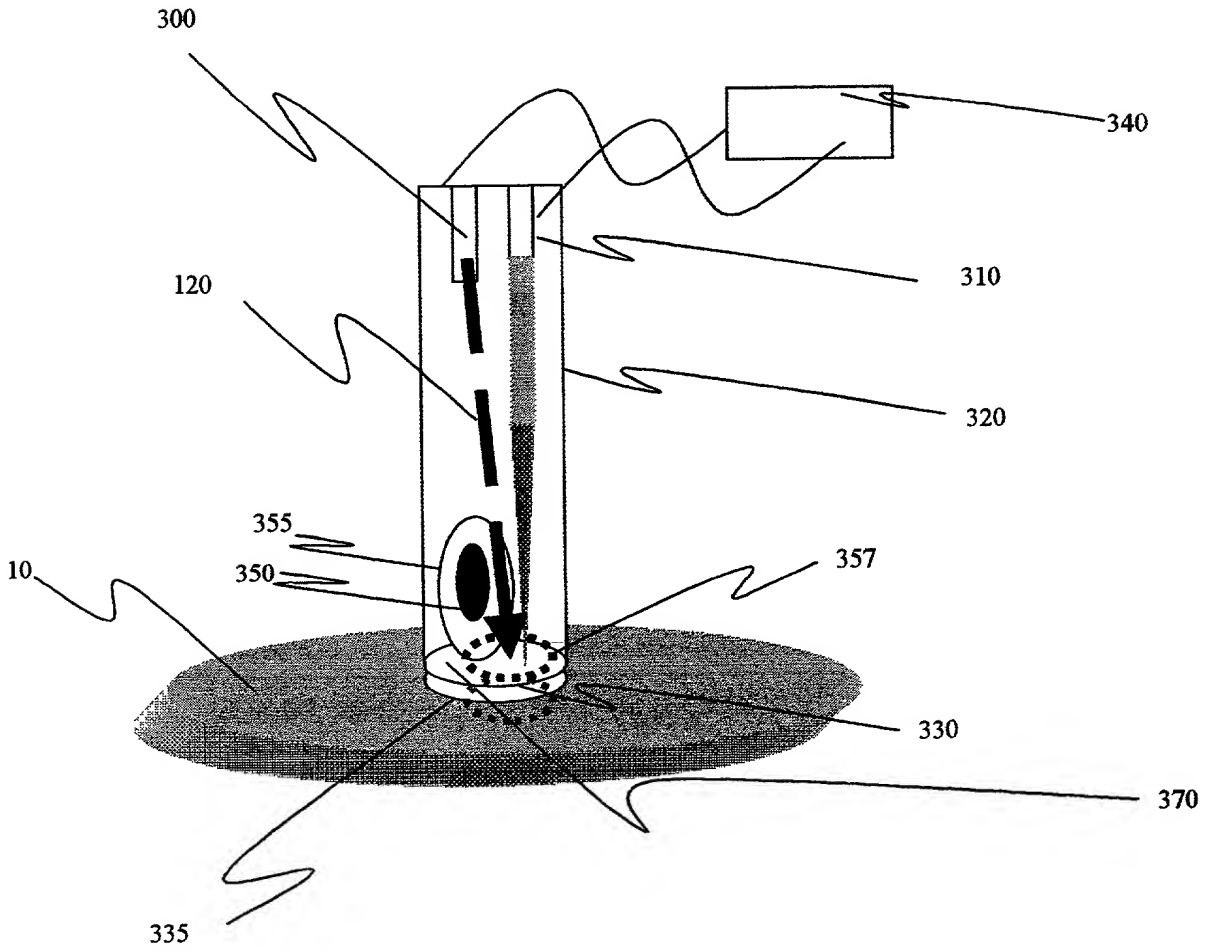


Figure 2B

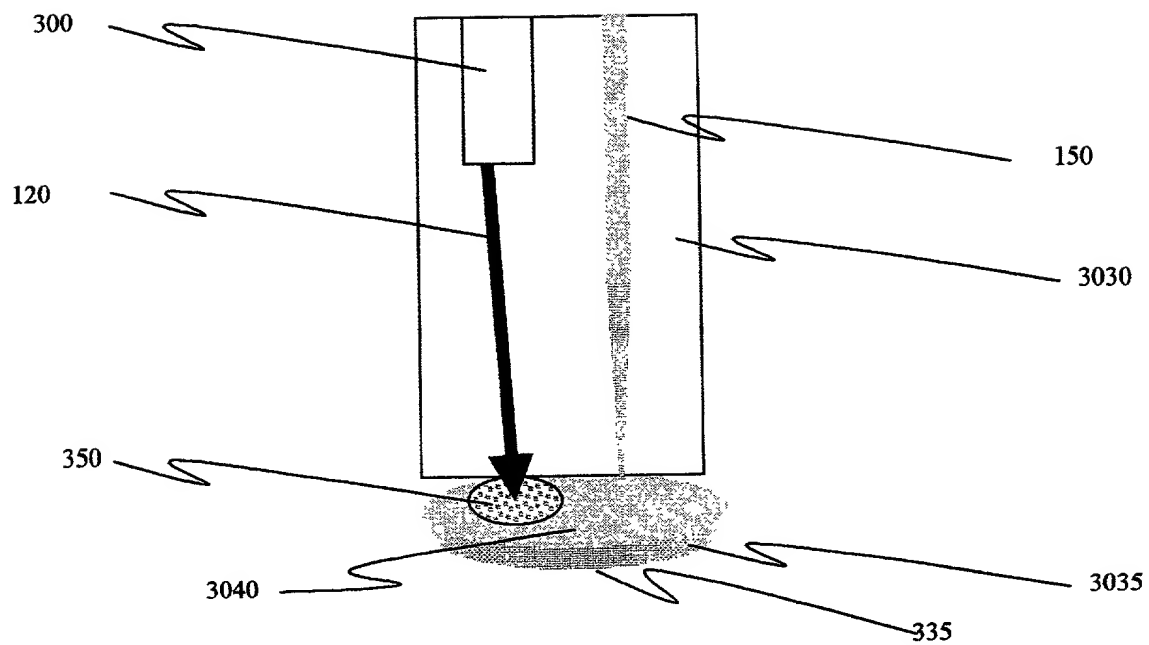


Figure 3A

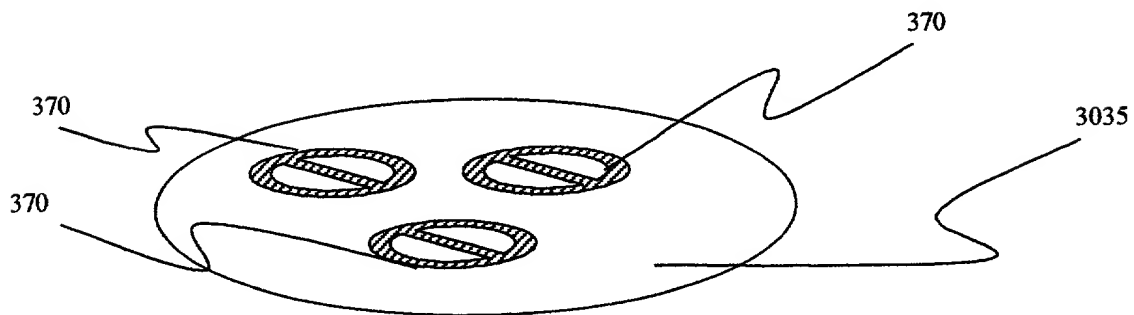


Figure 3B

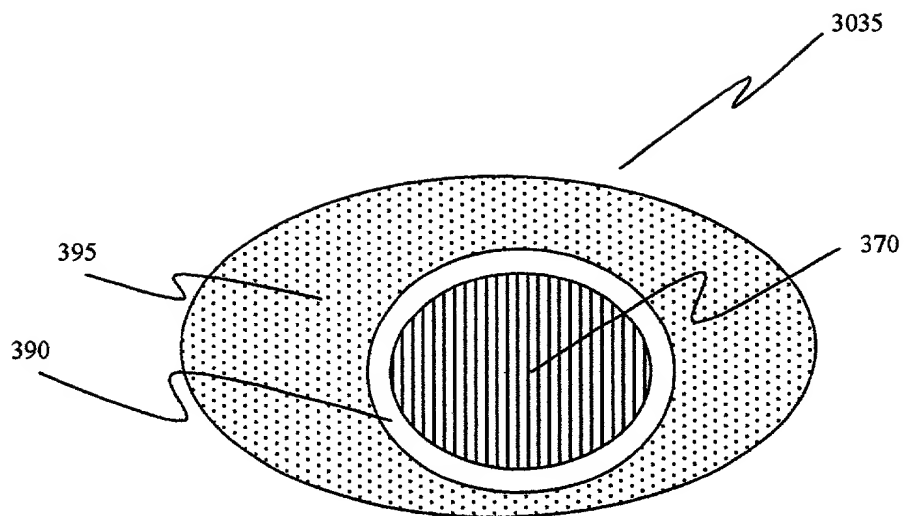


Figure 3C

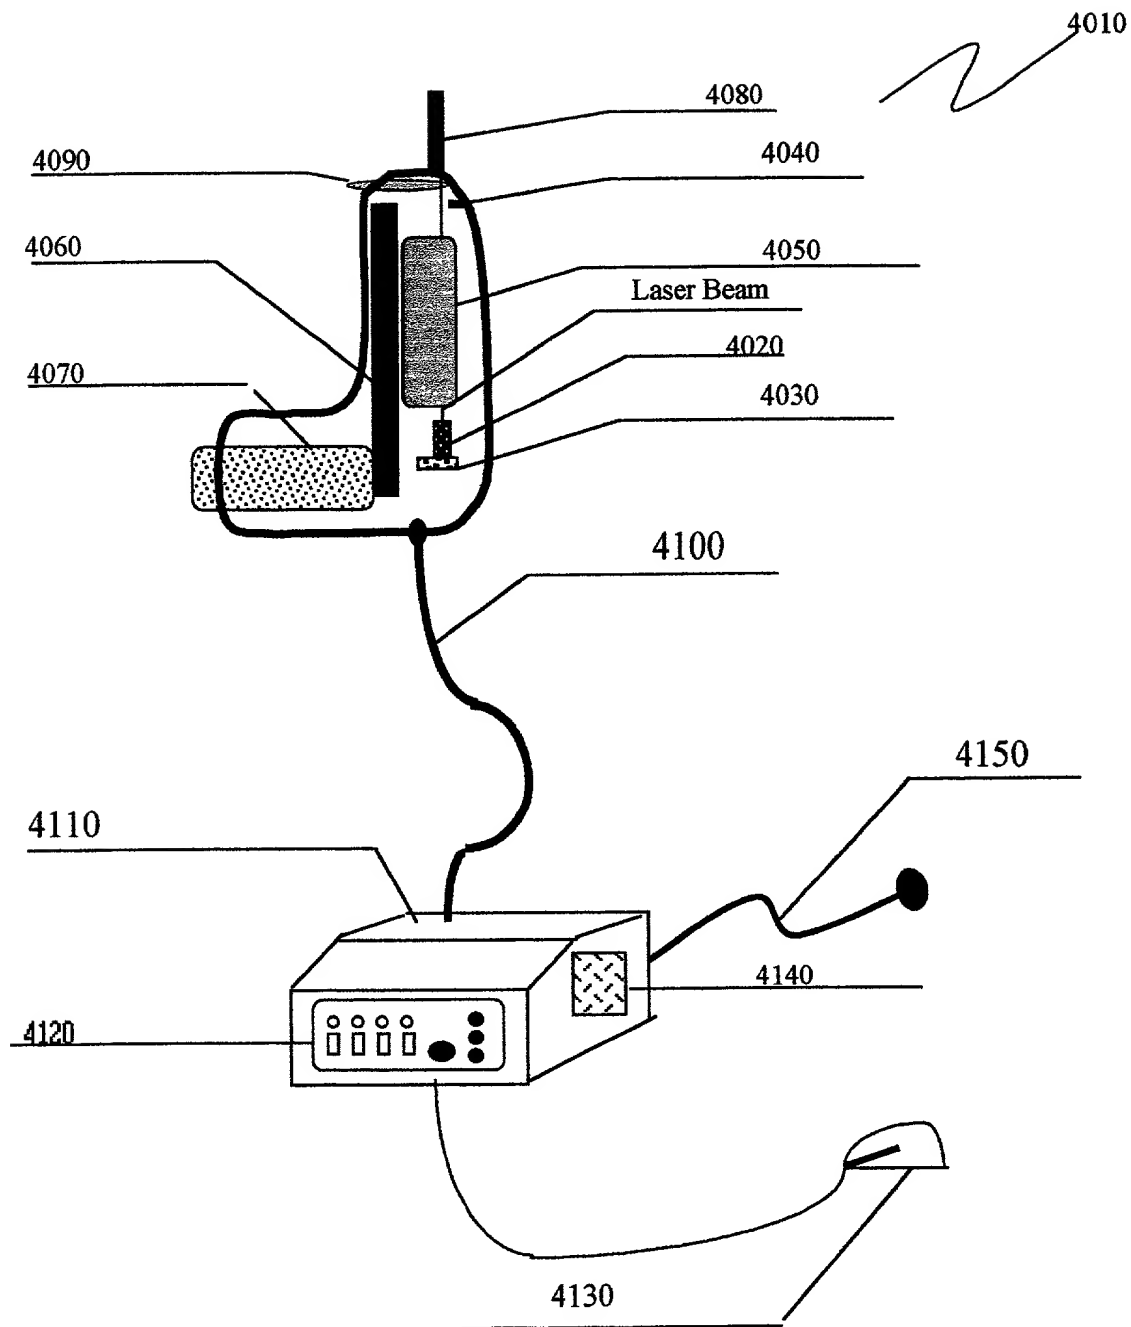


Figure 4

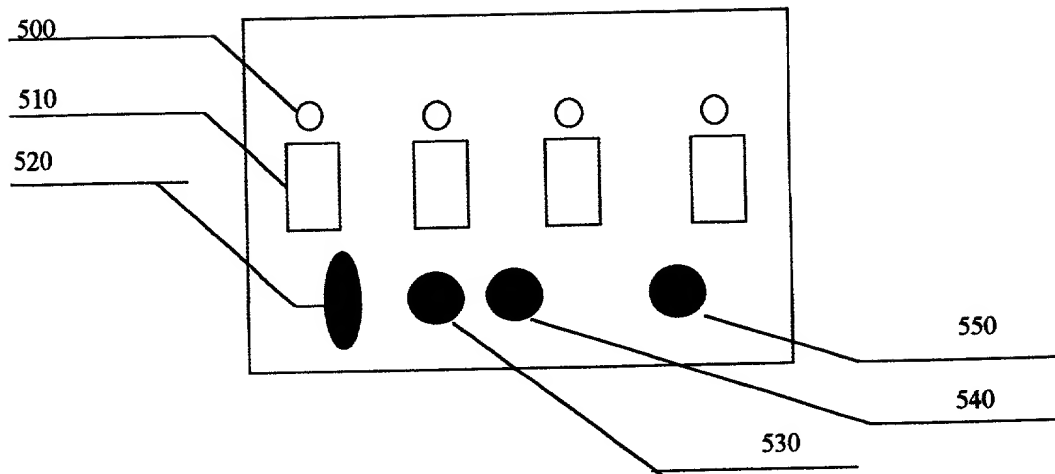
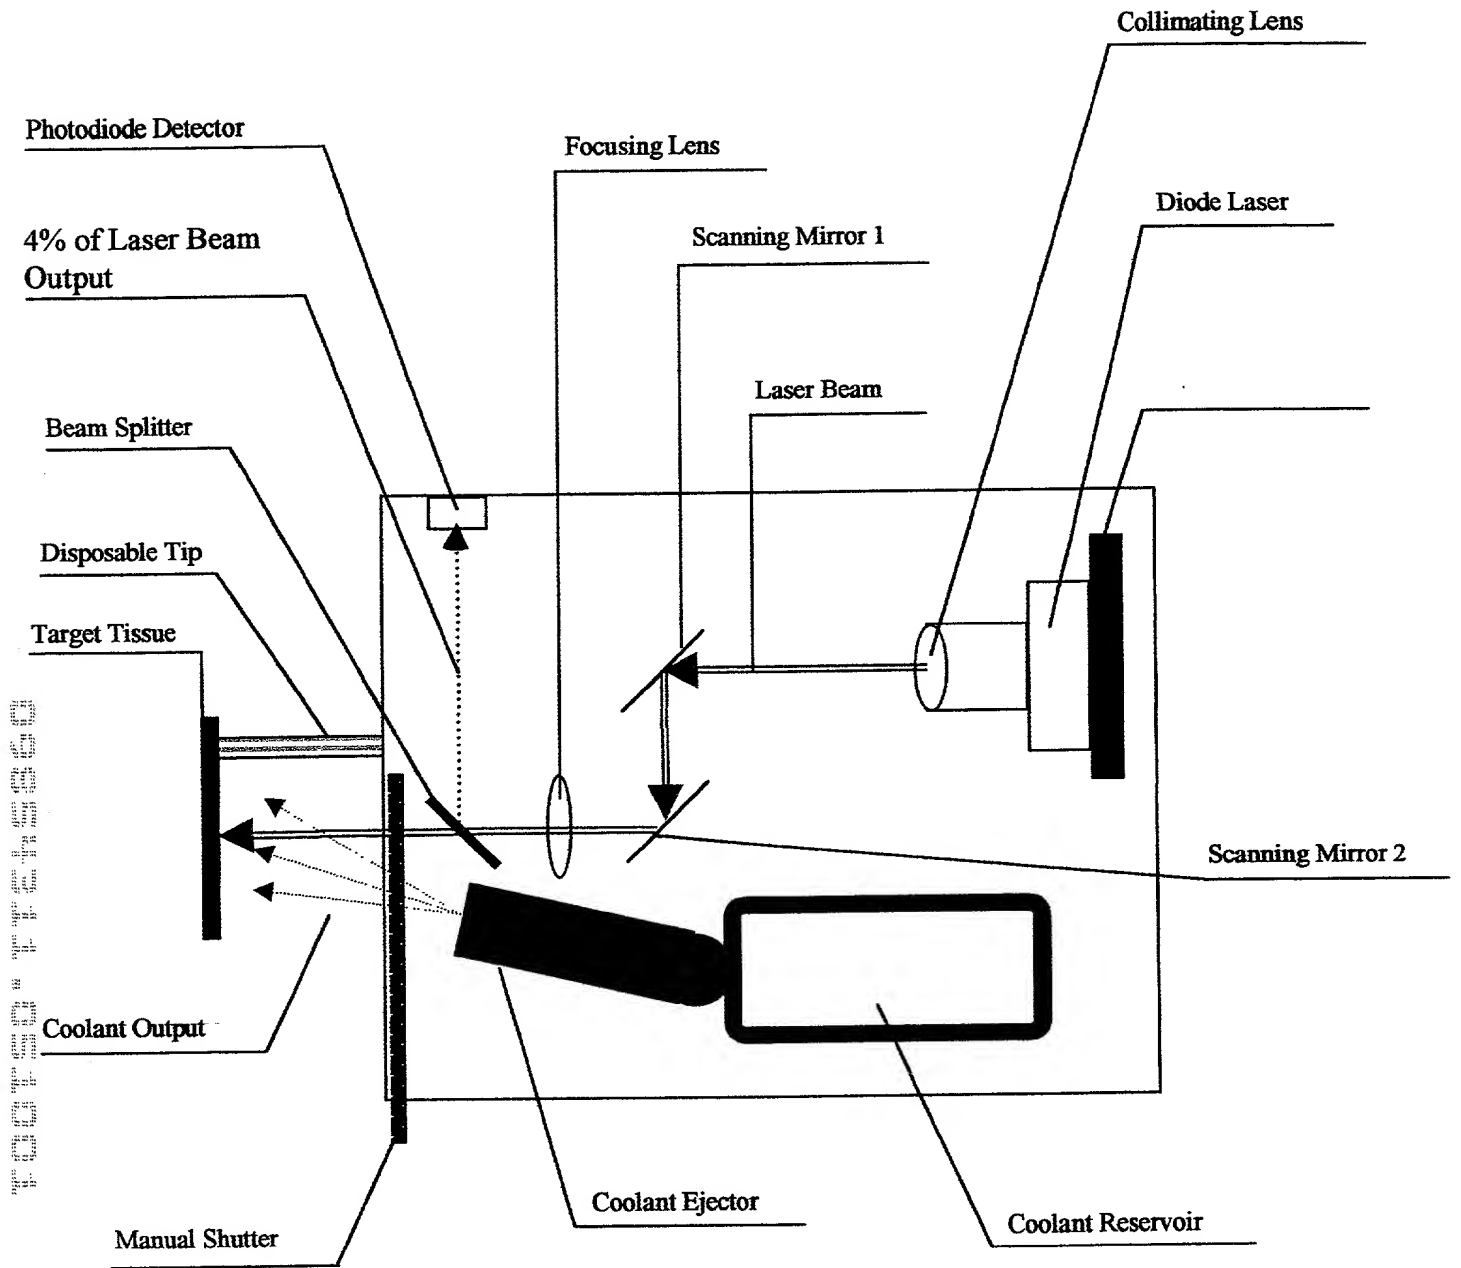


Figure 5. An exemplary device control box



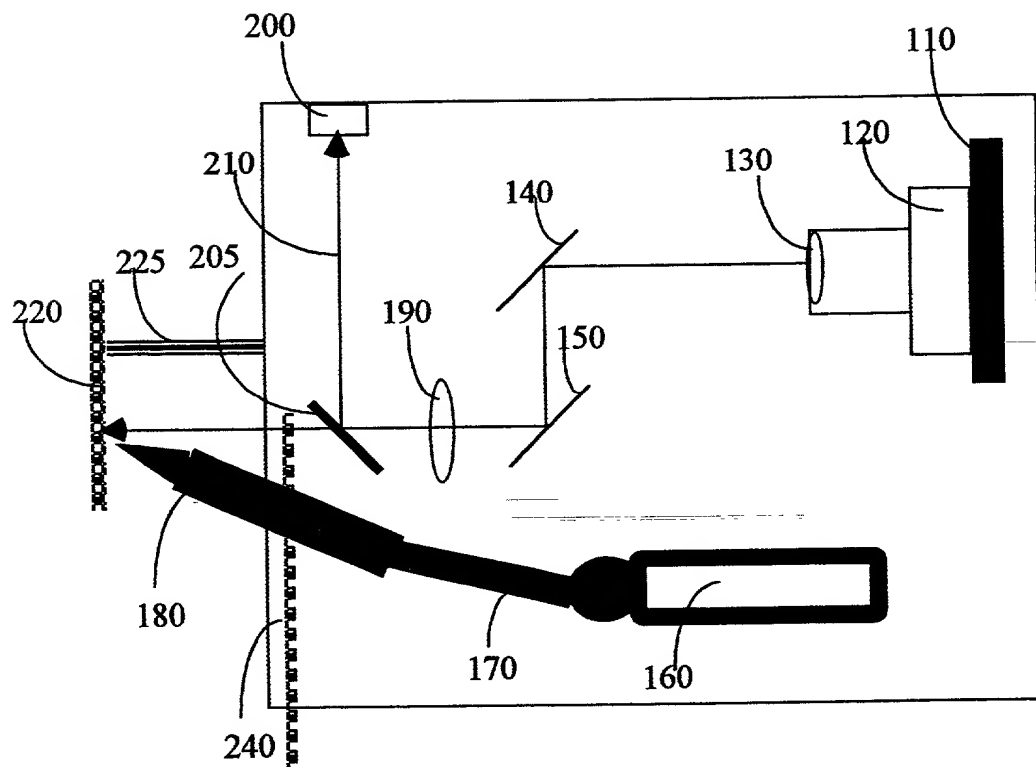


Figure 6
Schematic of the optical beam path and the
LogicWand™ beam.

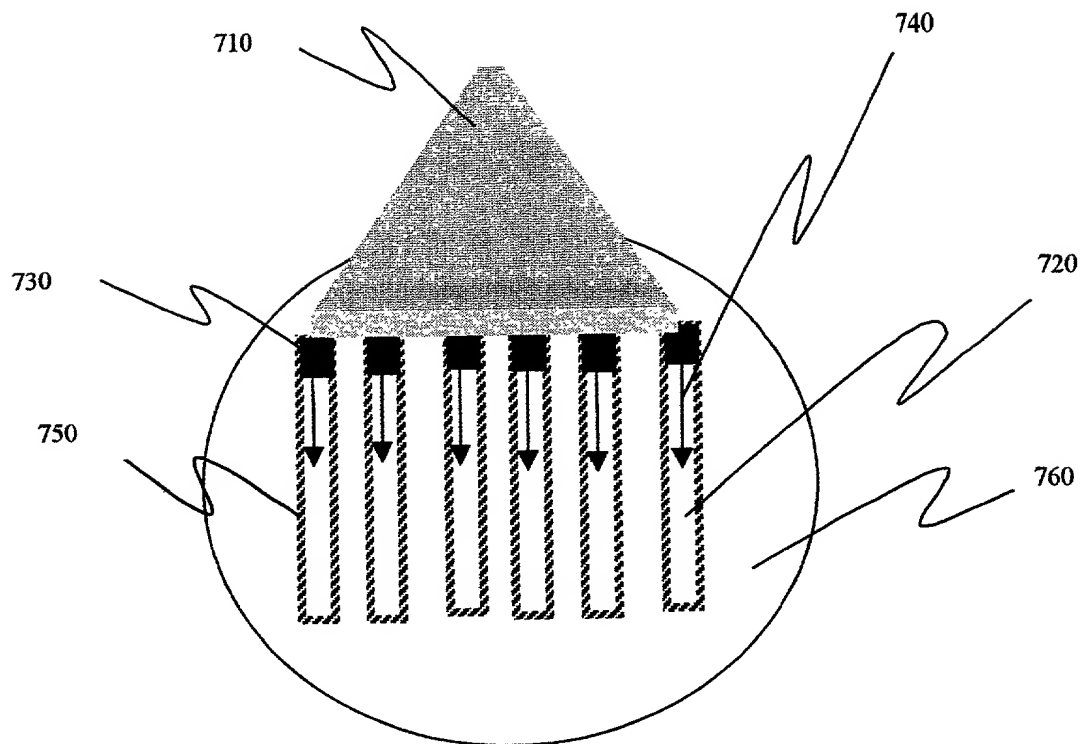


Figure 7A: Non-Beam Steering

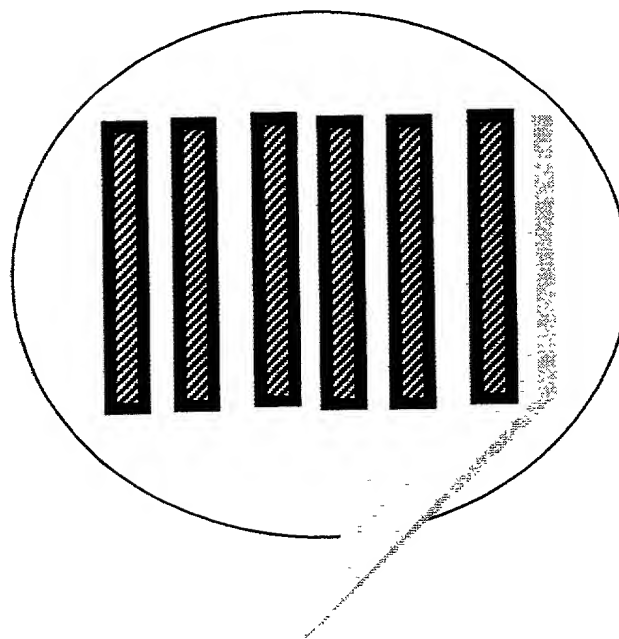


Figure 7B the scanning line.

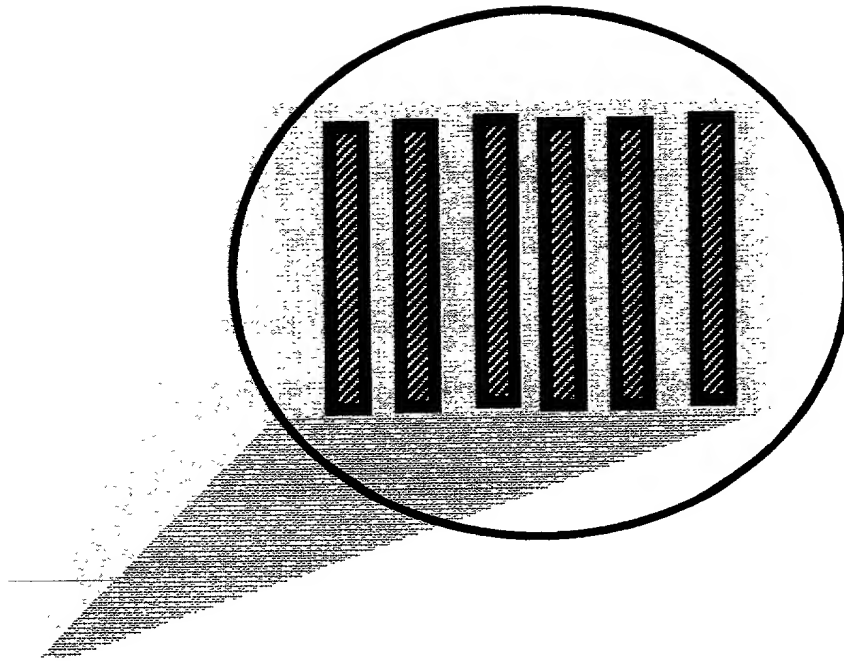


Figure 7C the broad beam.

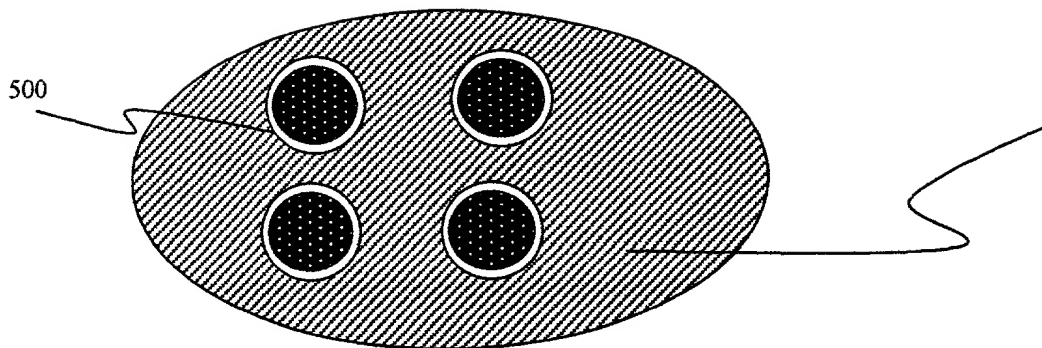


Figure XX

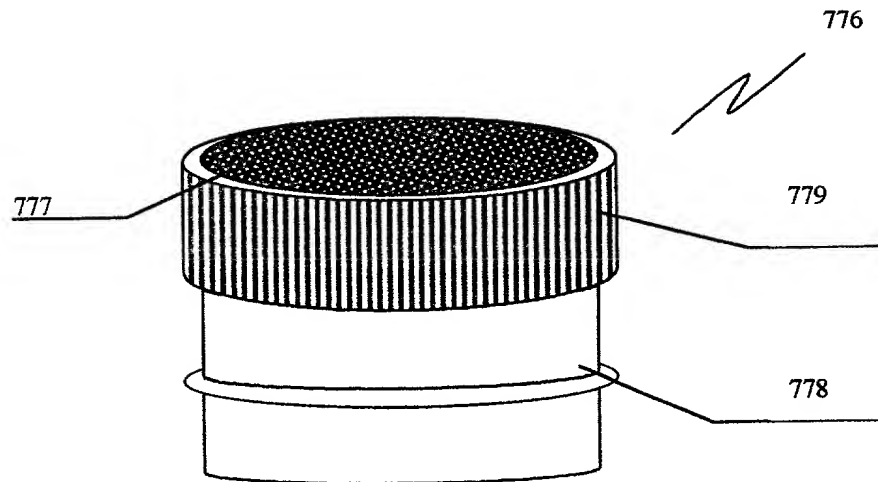


Figure 7D The disposable cup with intermediate material showing the intermediate material to be put in contact with the target material.

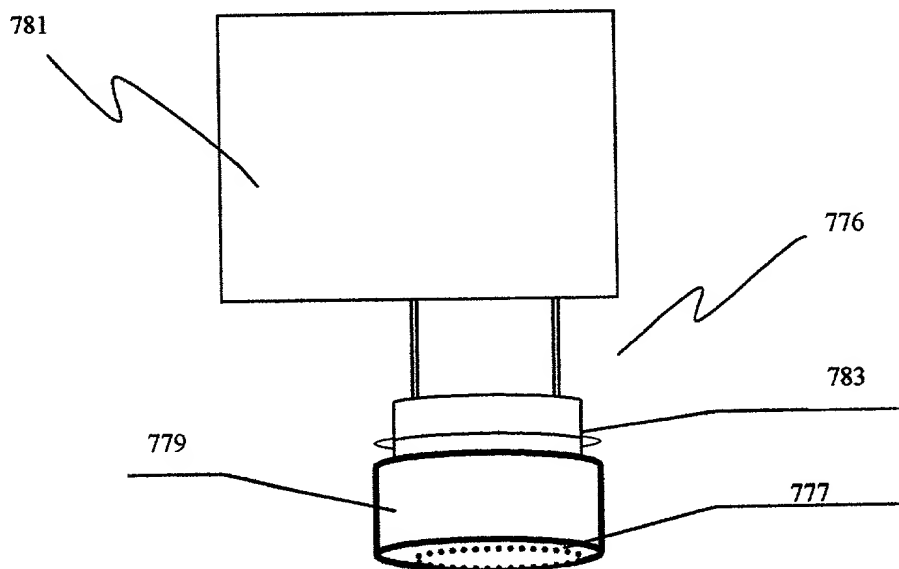


Figure 7E. The disposable cup with intermediate material attached to the energy source.

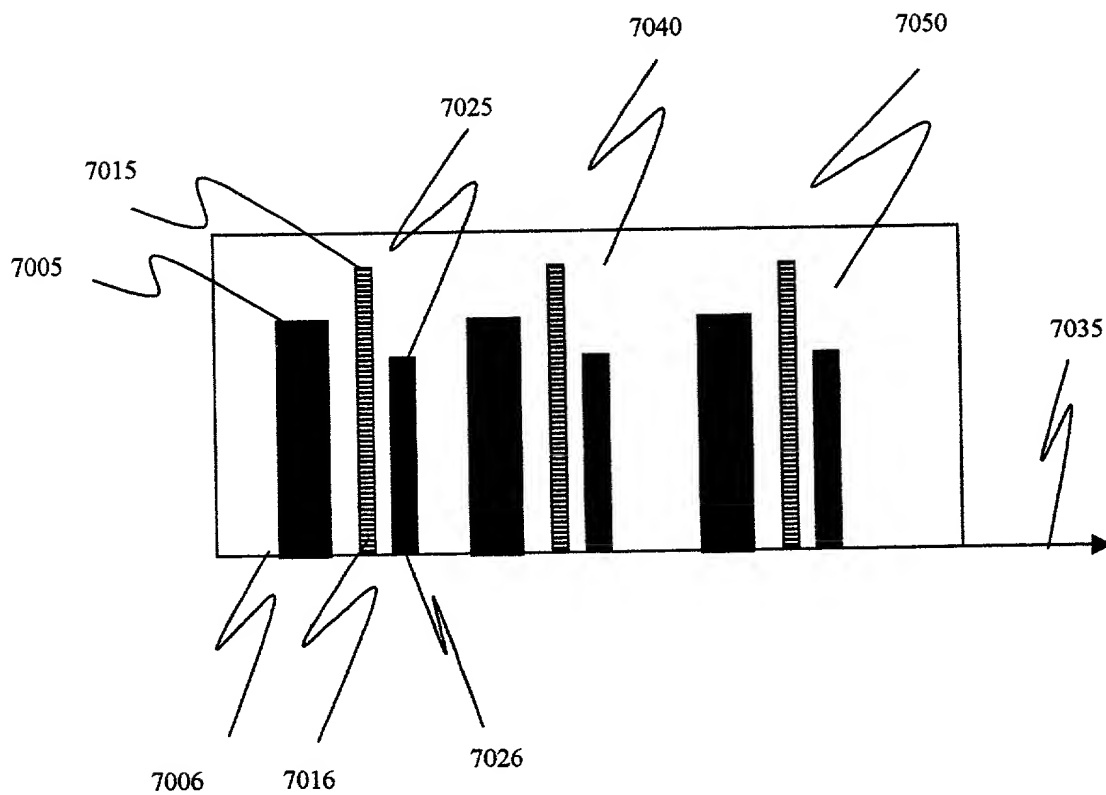


Figure 7F